



## Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery

Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

### General Design for Standby Power Applications

#### 【Design Life】

Up to 20 Years in Standby Service at 25°C  
Eurobat (20°C) : >12 years very Long Life

#### 【Operating Temperature Range】

Nominal Operating Temperature: 25°C (77°F)  
Discharge : -15°C ~ 50°C (5°F ~ 122°F)  
Charge : -15°C ~ 40°C (5°F ~ 104°F)  
Storage : -15°C ~ 40°C (5°F ~ 104°F)

#### 【Float Charging Voltage】

2.21 ~ 2.25 VDC/Unit at 25°C (77°F)

#### 【Equalization Charging Voltage】

2.35 VDC/Unit at 25°C (77°F)


#### 【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

## Specification

Nominal Voltage	2V (single cells per unit)
Nominal Capacity	1500Ah@10HR-rate to 1.80V per cell @25°C (77°F)
Weight	Approx. 91.50 Kg (201.67 lbs)
Maximum Discharge Current	9000A (5sec)
Internal Resistance	Approx. 0.31 mΩ
Short Circuit Current	--
Maximum Charge Current	450A
Terminal types	I3 thread copper alloy terminal to accept M10 bolt
Terminal tightening torque	249±50 Kgf-cm / 216±43 Lbf-in / 24.4±4.9 N-m
Container Material	Flame Retardant Polypropylene (UL 94-VO)

Dimensions	Length (L)	437.0±3.0mm	17.20±0.12inch
	Width (W)	172.0±3.0mm	6.77±0.12inch
	Container Height (h)	497.0±3.0mm	19.57±0.12inch

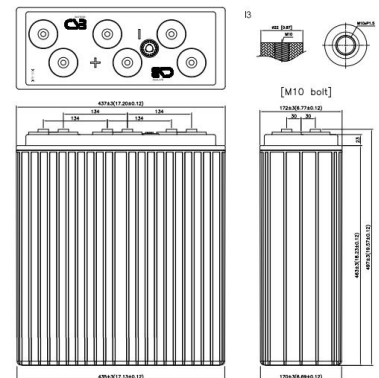

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	1630	1017	763	625	534	470	308	263	205	169	84.5	70.4
1.67V	1563	993	746	610	522	459	301	258	201	165	82.5	68.8
1.70V	1475	956	725	591	504	442	291	251	195	160	80.0	66.7
1.75V	1351	904	688	566	483	425	282	243	190	156	78.0	65.0
1.80V	1210	830	641	533	415	401	269	232	183	150	75.0	62.5
1.83V	1071	754	591	497	426	375	254	220	175	143	71.5	59.6

### Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	2559	1759	1328	1100	943	832	554	476	373	309	155	129
1.67V	2516	1728	1306	1086	932	822	548	472	370	305	153	127
1.70V	2463	1683	1283	1064	909	800	535	467	365	301	151	125
1.75V	2310	1600	1225	1024	878	774	522	454	357	295	148	123
1.80V	2130	1486	1154	975	836	738	503	436	346	285	143	119
1.83V	1960	1380	1087	929	798	705	485	420	336	276	138	115

Please refer to the official site for the latest rating confirmation.

**Guang dong Xi shibi Power Co.,Ltd**

Tel: (总机) 020-84854238 Fax: 020-84854238

E-mail: csbusa@battery.com