

Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.

Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.



Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 years, Standard Commercial

【Operating Temperature Range】

Nominal Operating Temperature: 25°C (77°F)
Discharge: -15°C ~ 50°C (5°F ~ 122°F)
Charge: -15°C ~ 40°C (5°F ~ 104°F)
Storage: -15°C ~ 40°C (5°F ~ 104°F)

【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】

14.4 ~ 15.0 VDC/Unit at 25°C (77°F)


【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification

Design according with IEC 61056-1/2: 2012

Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	16W@15Min-rate to 1.67V per cell @25°C (77°F)		
Weight	Approx. 1.34 Kg (2.95 lbs)		
Maximum Discharge Current	60/90A (5sec)		
Internal Resistance	Approx. 29.8 mΩ		
Short Circuit Current	168A		
Maximum Charge Current	1.6A		
Terminal types	F1/F2 terminal -Faston Tab 187/250		
Terminal tightening torque	--		
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request		
Dimensions	Length (L)	90.0±1.0 mm	3.54±0.04inch
	Width (W)	70.0±1.0 mm	2.76±0.04inch
	Container Height (h)	101.8±1.5 mm	4.01±0.06inch
	Overall Height (H)	106.1±1.5 mm	4.18±0.06inch

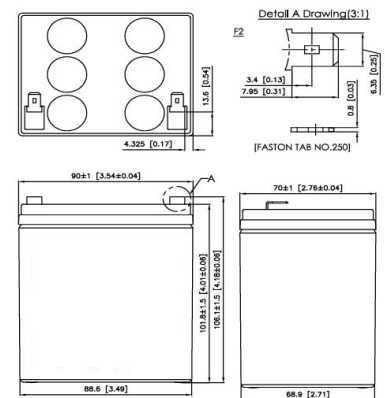

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	36.5	24.0	20.5	18.0	14.4	11.9	8.80	6.91	4.91	3.50	2.75	1.96
1.65V	33.8	22.7	19.7	17.6	14.1	11.8	8.66	6.87	4.89	3.48	2.73	1.94
1.70V	32.0	22.1	19.2	17.1	13.9	11.7	8.61	6.83	4.87	3.46	2.71	1.92
1.75V	28.8	20.7	18.1	16.2	13.4	11.4	8.42	6.71	4.80	3.42	2.69	1.90
1.80V	25.0	19.1	16.8	15.2	12.6	10.9	8.22	6.51	4.69	3.36	2.65	1.88
1.85V	21.8	17.0	15.0	13.6	11.6	10.1	7.60	6.07	4.46	3.21	2.54	1.82

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	2MIN	4MIN	5MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	45MIN	60MIN	90MIN
1.60V	367	246	214	191	157	134	99.4	79.2	57.3	41.2	32.6	23.1
1.65V	341	240	209	187	153	132	98.6	78.1	56.8	40.8	32.3	23.0
1.70V	326	233	204	183	152	131	97.2	77.9	56.6	40.6	32.1	22.9
1.75V	298	221	195	176	146	127	96.5	76.8	56.4	40.3	31.8	22.8
1.80V	270	204	182	165	141	122	92.9	74.9	55.3	39.6	31.3	22.3
1.85V	239	184	165	151	131	113	87.5	70.4	52.9	38.3	30.4	21.6

Please refer to the official site for the latest rating confirmation.

Guang dong Xi shibi Power Co.,Ltd

Tel: (总机) 020-84854238 Fax: 020-84854238

E-mail: csbusa@battery.com