

Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.

Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.



Design for Standby Power Applications

【Design Life】

Up to 5 Years in Standby Service at 25°C
Eurobat (20°C) : 3-5 years, Standard Commercial

【Operating Temperature Range】

Nominal Operating Temperature: 25°C (77°F)
Discharge: -15°C ~ 50°C (5°F ~ 122°F)
Charge: -15°C ~ 40°C (5°F ~ 104°F)
Storage: -15°C ~ 40°C (5°F ~ 104°F)

【Float Charging Voltage】

6.75 ~ 6.90 VDC/Unit at 25°C (77°F)

【Equalization Charging Voltage】

7.2 ~ 7.5 VDC/Unit at 25°C (77°F)


【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification

Design according with IEC 61056-1/2: 2012

Nominal Voltage	6V (3 cells per unit)		
Nominal Capacity	12AH @20HR-rate to 1.75V per cell @25°C (77°F)		
Weight	Approx. 1.85 Kg (4.08 lbs)		
Maximum Discharge Current	150/180A (5sec)		
Internal Resistance	Approx. 8.9 mΩ		
Short Circuit Current	427A		
Maximum Charge Current	3.6A		
Terminal types	F1/F2 terminal -Faston Tab 187/250		
Terminal tightening torque	--		
Container Material	ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request		
Dimensions	Length (L)	151.0±2.0 mm	5.94±0.08inch
	Width (W)	50.0±1.0 mm	1.97±0.04inch
	Container Height (h)	94.5±1.0 mm	3.71±0.04inch
	Overall Height (H)	100.5±1.5 mm	3.96±0.06inch

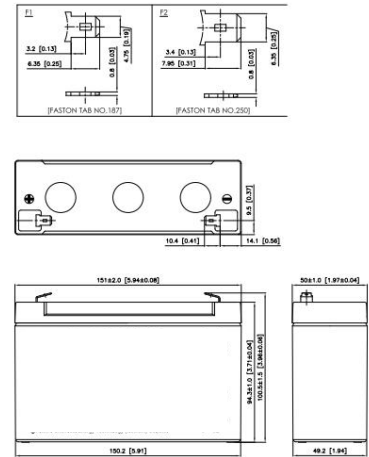

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HRr	20HR
1.60V	51.2	33.2	23.9	13.9	8.14	5.90	4.69	3.37	2.24	1.45	1.19	0.64
1.65V	48.2	32.0	23.6	13.7	8.12	5.84	4.62	3.35	2.21	1.44	1.18	0.62
1.70V	46.3	31.6	23.3	13.6	8.08	5.82	4.61	3.32	2.18	1.43	1.17	0.61
1.75V	43.3	30.0	22.6	13.4	8.03	5.77	4.57	3.26	2.13	1.40	1.15	0.60
1.80V	38.8	28.0	21.5	13.0	7.81	5.64	4.48	3.17	2.06	1.37	1.14	0.58
1.85V	34.2	25.3	19.8	12.3	7.51	5.41	4.29	3.03	1.97	1.32	1.09	0.57

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HRr	20HR
1.60V	269	173	134	79.8	48.9	35.3	28.0	19.8	12.7	8.36	6.91	3.85
1.65V	257	171	132	79.6	48.8	35.1	27.8	19.7	12.6	8.30	6.85	3.81
1.70V	250	168	131	78.8	48.5	35.0	27.7	19.5	12.5	8.25	6.80	3.80
1.75V	231	163	128	78.1	48.1	34.6	27.5	19.3	12.2	8.12	6.69	3.77
1.80V	209	153	121	76.3	47.4	34.0	26.8	18.9	12.0	7.91	6.52	3.71
1.85V	185	140	111	72.2	45.8	33.1	26.3	18.1	11.7	7.73	6.36	3.61

Please refer to the official site for the latest rating confirmation.

Guang dong Xi shibi Power Co.,Ltd

Tel: (总机) 020-84854238 Fax: 020-84854238

E-mail: csbusa@battery.com